


Power Chokes®

Model SCT Compact Drilling Choke

The Model SCT is a forged body high-pressure drilling choke for severe service, available as an adjustable or a positive model.

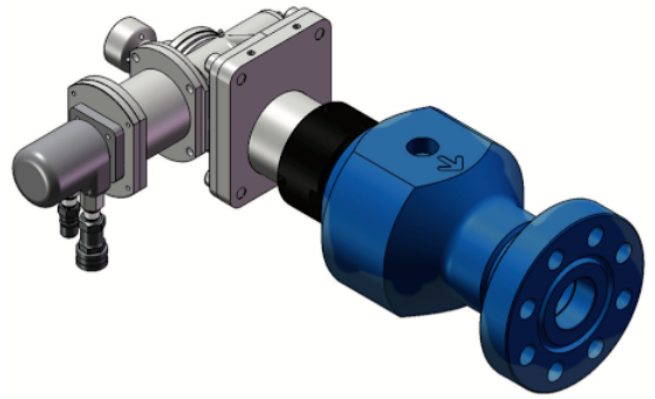

FEATURES

Adjustable Choke

- Worm gear drive actuator – eliminates backlash and provides precise control; self-locking to prevent movement even if hydraulic pressure is lost
- Quick change actuator – no need to disconnect hoses for removal. Trim can be changed in 15 minutes or less without removing the choke from the line or breaking into the manifold
- Accommodates 1.1/2" or 2" trim size
- Manual override capability - provided on all worm gear-operated hydraulic chokes in case of power loss
- Other types of actuator available – in addition to the exclusively modified worm gear actuator, our chokes are available with hydraulic piston, positive, electric, or manual actuators
- Reversible gate and seat assembly – provides a minimum of two uses per piece, saving parts, reducing operating costs, and maximizing efficiency. Can be reversed in the field
- Solid tungsten carbide gate and seat–proven design provides maximum erosion resistance. Gate and seat are precision-ground to provide drop tight shut off

Positive Choke

- Quick change bean – bonnet easily removable. Service tools available to remove bean and bean carrier quickly for inspection or replacement
- Numerous bean sizes – accepts 1" (64/64ths) maximum orifice H2-style or OCT-style bean, or a 2" solid tungsten carbide bean seat (128/64ths)

All Chokes

- Pressure balanced trim – reduces operating forces, whether the choke is operated manually or automatically. Large balance ports protect clogging
- Downstream wear sleeve and retainer ring – extended-length solid tungsten carbide seat provides wear protection downstream and a smooth transition for fluid into the downstream piping
- Large buffer cavity – slows velocity and distributes the impact of solids, maximizing trim life and reducing downstream wear.

Patented Actuator Manipulator Option

- Allows one-man, in-line servicing of chokes
- No lifting device required
- 15-minute service time

Control Consoles

- Offer operation for one, two, or more chokes and/or hydraulic control valves
- Speed adjusts to allow fast or slow choke movement
- One or two hydraulic pumps plus manual backup hydraulic pump
- Bourdon tube hydraulic pressure gauges or digital pressures gauges available
- Digital position indicator gauge standard
- Accumulators available for power backup or to smooth choke operation
- Electric choke controls and automation

Both Adjustable and Positive Chokes supplied with:

- Bleeder port to bleed pressure from choke body before choke bonnet removal for inspection or maintenance
- Studded inlet X flanged outlet standard. Flanged inlets available
- 2" or 3" inlet X 3" outlet standard for API 5M, 1,,0M or 15M service
- Other inlet and outlet sizes available
- Compact design allows choke to fit in manifolds

Power Chokes®

Model SCT Compact Drilling Choke



Standard configuration

(Reversible, balanced, erosion-resistant trim)

Pressure ratings available		API 5,000, 10,000 psi
Inlet size range		2 1/16" to 3 1/16"
Outlet size range		2 1/16" to 3 1/16"
Trim sizes available		1 1/2", or 2"
Testing		API 6A, API 16C
Body material		API 75K, NACE MR01-75
Throttling trim material		Tungsten carbide
Seat material		Tungsten carbide
Seat leakage		Drop tight
API temperature ranges	Standard Optional	-20°F to +250°F (-29°C to +121°C) -75°F to +350°F (-60°C to +177°C)
API 6A PSL		1 - 3, 3G
API 6A PR		1 - 2
Standard X & Y		3.5" x 11.75"

General design specifications

Open for controllability (maximum)	85%
Open for controllability (minimum)	2%
Exit velocity (maximum)	1.0 Mach
Downstream velocity (gas) (maximum)	0.3 Mach
Downstream velocity (liquid) (maximum)	100 - 200 ft/sec
Hydraulic operating pressure	1,500 psi
Seat leakage	Drop tight (Exceeds ANSI class V)
Throttling pressure drop	Full rated pressure

For further questions or quotation requests, contact PowerChokes-Sales@adsmpd.com.

Visit www.powerchokes.co for chokes, controls, and PRV solutions and www.adsmpd.com for RCDs and MPD solutions.