

Power Chokes[®]

30" Diverter with Element



30" Diverter with Element

- Up to 30" Surface Flow Control
 - Nipples up to 30" conductor to control well flow while drilling initial surface.

Features and Benefits


- 30" pipe for large diameter conductors
 - Allows customers who set a large diameter conductor to still maintain surface flow securely
- Weld on bottom application
 - Can be welded directly to conductor and cut off after surface.
- 10" Outlet
 - Allows customization to fit most standard rig flowlines.
- Split Element Retainer
 - Allows full-bore pass through with easy nipple up/down for BHA.

Value and Key Differentiators

The 30" Diverter with weld-on base allows customers to customize the surface well flow options, with a safe, efficient and economic option.

- Weld-on base prevents the need for chaining and binding other surface slip-over options require.
- Allows easy install of most size elements for different drill pipe sizes.
- Economic and able to be combined with our other full RCD units to meet all the needs for the entire length of your well-bore.
- Equipped with rated lifting eyes for easy transport and rig up.
- Manufactured at our Odessa, TX, API certified facility.

30" Diverter with Element

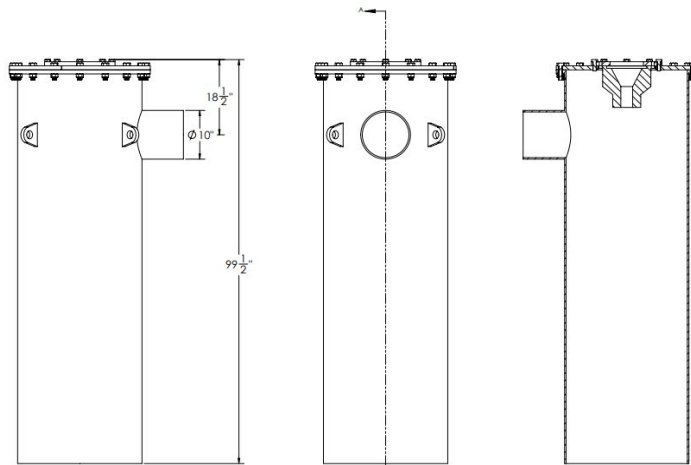

Contact

For further information, please contact:

PowerChokes-Sales@adsmprd.com

Or visit:

www.powerchokes.co